

## Consecutive Runs -

Requires fewer uprights. Total number of bays + 1 = Uprights Needed  
(2 Bays = 3 Uprights)


Capacity is shared among uprights - overall capacity slightly lower  
Must be ran in a straight line

## Each shelf requires 2 beams

Manufacturer recommends at least 3 shelves

First shelf should be 36"-48" from the ground

Wire decking is typically placed over beams to create shelf surface

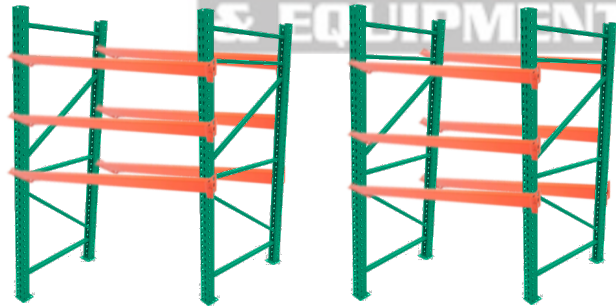

## Individual Runs -

Require more uprights. 2 Uprights per Unit/Bay  
(2 Bays = 4 Uprights)

Capacity is non impacted  
Allows greater flexibility for space